

TiiP International Inc.

2-50 Alex Avenue
Woodbridge ON L4L5X1
Tel: 905-856-2634
Fax: 905-851-6877
sales@tiipinc.com
www.tiipinc.com

STAINLESS STEEL
CHANNEL FRAMED MIRROR

SERIES 850

CHANNEL FRAME

One piece frame formed of 3/8" (9.53mm)
X 1/2" (12.7mm) X 3/8" (9.53mm) type
T430 BA stainless steel. Frame has square,
tightly mitered corners, with unique concealed
screw fixings to ensure easy field mirror
replacement. Plastic protective coating placed
on frame.

MIRROR

No.1 selected polished 5 mm float glass with
chemically deposited silver, electrolytically copper
plated followed by a heavy coating of tough
elastic paint. Mirrors conforming to CGSB
12.5-86 Type 1B and guaranteed against silver
spoilage for a period of ten years.

STOCK SIZES *


Width	Height
16" (406mm)	24" (609mm)
16" (406mm)	30" (761mm)
18" (457mm)	24" (609mm)
18" (457mm)	30" (761mm)
18" (457mm)	36" (914mm)
24" (609mm)	30" (761mm)
24" (609mm)	36" (914mm)

* Custom Sizes Available

Weight: 4 lbs / sq. ft (NOT BOXED)

GLAZING OPTIONS

Acrylic Mirror
Tempered Mirror
Laminated Mirror
Stainless Steel Mirror
6mm Mirror

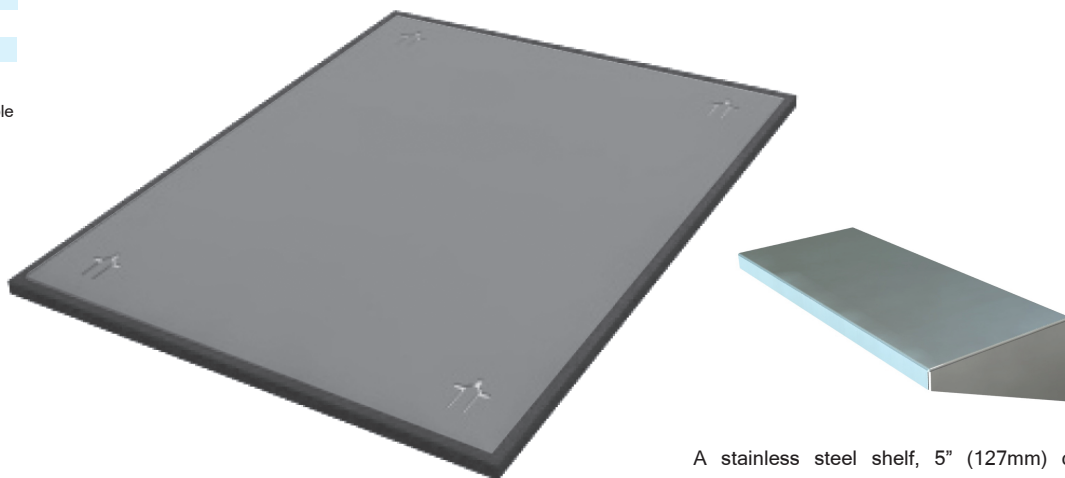

*BACK

A stainless steel shelf, 5" (127mm) deep
is available for separate mounting below
all mirrors.

TiiP International Inc.

2-50 Alex Avenue
Woodbridge ON L4L5X1
Tel: 905-856-2634
Fax: 905-851-6877
sales@tiipinc.com
www.tiipinc.com




STAINLESS STEEL
CHANNEL FRAMED MIRROR

SERIES 850


FEATURES

Mirror is protected with a 3/16" (4.76mm) non moisture absorbent shock resistant primary back. This material will not absorb or retain moisture and cushions the mirror by absorbing shocks. The secondary back is of 0.37" (.94mm) satin coat steel.


Three way keyhole slots, for either vertical or horizontal mounting, together with theft resistant clips assure a vandal resistant secure wall mounting.

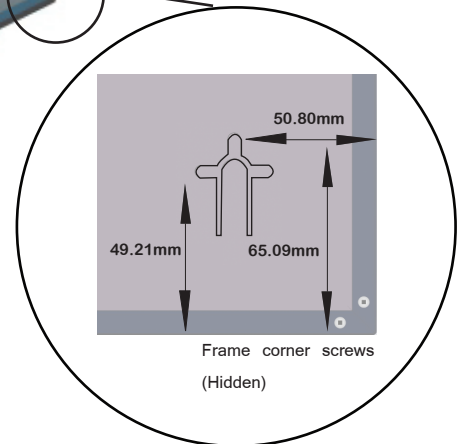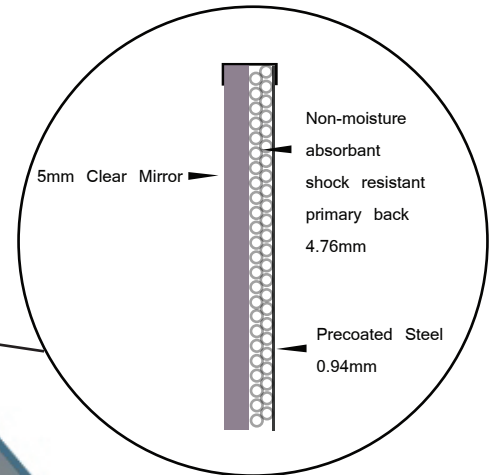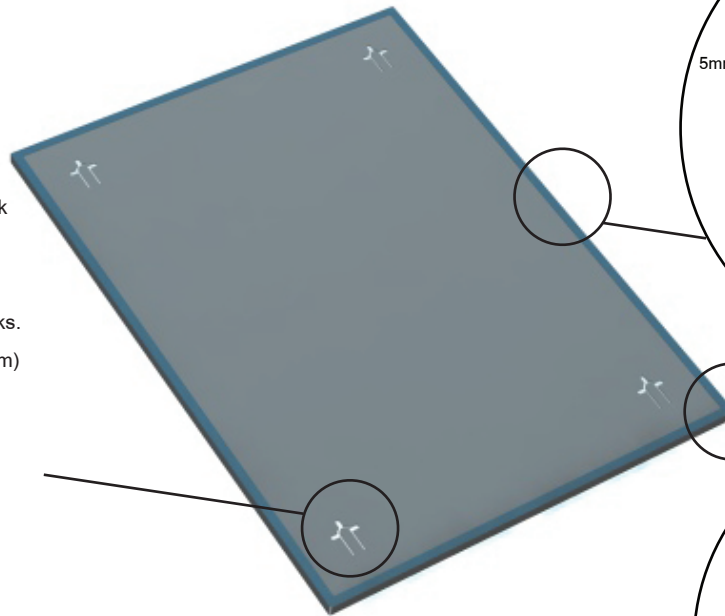


INSTRUCTIONS

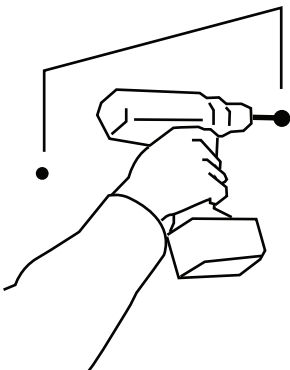

1. Mark on wall, and drill.



2. Clover Leaf tab will push in as mirror is pushed against screw in wall.

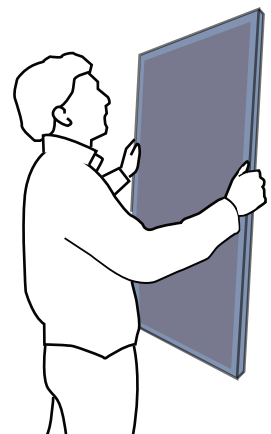

3. Once Mirror is against wall, push mirror down or sideways. Tab will then spring up to stop head of screw from coming back out of slot.