

TiiP International Inc.

2-50 Alex Avenue

Woodbridge ON L4L5X1

Tel: 905-856-2634

Fax: 905-851-6877

sales@tiipinc.com

www.tiipinc.com

STAINLESS STEEL
CHANNEL FRAMED MIRROR

SERIES 850

FIXED
TILT

FIXED TILT FRAME

One piece frame formed of 3/8" (9.53mm) X 1/2" (12.7mm) X 3/8" (9.53mm) type T430 BA stainless steel. Frame has square, tightly mitered corners, with unique concealed screw fixings to ensure easy field mirror replacement. Plastic protective coating placed on frame.

MIRROR

No.1 selected polished 5 mm float glass with chemically deposited silver, electrolytically copper plated followed by a heavy coating of tough elastic paint. Mirrors conforming to GSB 12-GD5A Type B and guaranteed against silver spoilage for a period of ten years.

STOCK SIZES *

| Width | Height |
|-------------|-------------|
| 16" (406mm) | 24" (609mm) |
| 16" (406mm) | 30" (761mm) |
| 18" (457mm) | 24" (609mm) |
| 18" (457mm) | 30" (761mm) |
| 18" (457mm) | 36" (914mm) |
| 24" (609mm) | 30" (761mm) |
| 24" (609mm) | 36" (914mm) |

* Custom Sizes Available

Weight: 5 lbs / sq. ft (NOT BOXED)

GLAZING OPTIONS

Acrylic Mirror

Tempered Mirror


Laminated Mirror

Stainless Steel Mirror

6mm Mirror



Back



A stainless steel shelf, 5" (127mm) deep is available for separate mounting below all mirrors.

TiiP International Inc.
2-50 Alex Avenue
Woodbridge ON L4L5X1
Tel: 905-856-2634
Fax: 905-851-6877
sales@tiipinc.com
www.tiipinc.com


STAINLESS STEEL
 CHANNEL FRAMED MIRROR

SERIES 850



**FIXED
TILT**

FEATURES

Mirror is protected with a 3/16" (4.76mm) non moisture absorbent shock resistant primary back. This material will not absorb or retain moisture and cushions the mirror by absorbing shocks. The secondary back is of 0.37" (.94mm) satin coat steel.

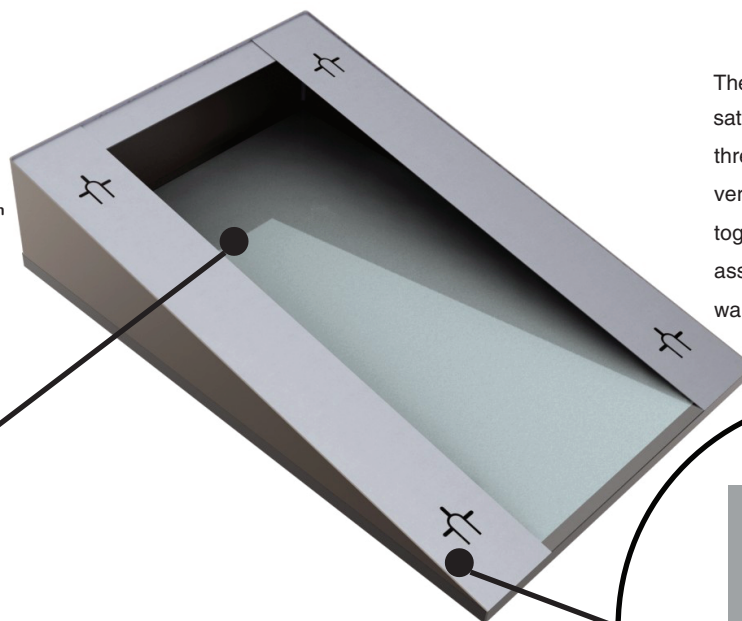


The back is constructed with 24 GA satine coated stainless steel. The three way keyhole slots, for either vertical or horizontal mounting, together with theft resistant clips assure a vandal resistant secure wall mounting.

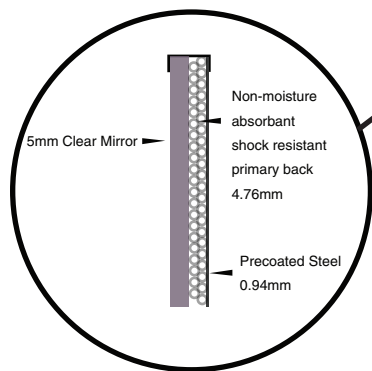


Frame corner screws
(Hidden)

INSTRUCTIONS

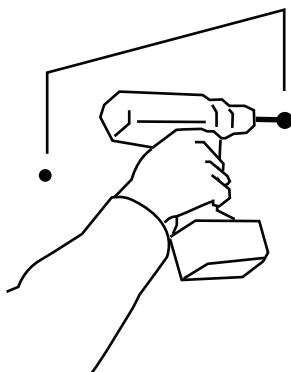

1. Mark on wall, and drill.



2. Clover Leaf tab will push in as mirror is pushed against screw in wall.



3. Once Mirror is against wall, push mirror down or sideways. Tab will then spring up to stop head of screw from coming back out of slot.